

MEASUREMENT REPORT

EN 300 328 V2.2.2 Bluetooth

Applicant: Escape bv
Address: Ter Heidelaan 50A, 3200 Aarschot, Belgium


Product Name: Portable Indoor/Outdoor Wireless Speaker System
Model No.: Escape P6 AIR
Brand Name: ESCAPE
Standards: EN 300 328 V2.2.2 (2019-07) Clause 4.3.1.10 & 4.3.1.11
AS/NZS 4268: 2017 Clause 6.4 & 7.2
Result: Complies
Test Date: August 04 ~ 06, 2020

Reviewed By:



Kevin Guo

Approved By:



Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2005RSU005-E1	Rev. 01	Initial Report	02-10-2021	Valid

Note: This device integrated a module which has been certified, this report only evaluated the “Transmitter Spurious Emissions” and “Receiver Spurious Emissions” test items.

CONTENTS

Description	Page
1. General Information	4
1.1. Applicant.....	4
1.2. Manufacturer	4
1.3. Testing Facility	4
1.4. Feature of Equipment under Test.....	5
1.5. Product Specification Subjective to this Report.....	5
1.6. Channel List	6
1.7. Standards Applicable for Testing.....	6
2. Test Configuration of Equipment under Test	7
2.1. Test Mode.....	7
2.2. Test Software.....	7
2.3. Test Environment Condition	7
3. Test Summary	8
4. Transmitter Unwanted Emissions in the Spurious Domain.....	9
4.1. Limit.....	9
4.2. Test Setup	9
4.3. Test Procedure	10
4.4. Test Result.....	11
5. Receiver Spurious Emissions	14
5.1. Limit.....	14
5.2. Test Setup	14
5.3. Test Procedure	15
5.4. Test Result.....	16
6. Measurement Uncertainty.....	19
7. List of Measuring Instrument	20
Appendix A - Test Setup Photograph	22
Appendix B - EUT Photograph.....	23

1.4. Feature of Equipment under Test

Product Name:	Portable Indoor/Outdoor Wireless Speaker System
Model No.:	Escape P6 AIR
Brand Name:	ESCAPE
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	Bluetooth v4.0 (Single mode for BR/EDR)

1.5. Product Specification Subjective to this Report

Operating Frequency:	2402~2480MHz
Channel Number:	79
Channel Spacing:	1MHz
Type of modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps (GFSK), 2Mbps ($\pi/4$ -DQPSK), 3Mbps (8DPSK)
Antenna Type:	PIFA Antenna
Antenna Gain:	3.00dBi

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: Above antenna information (antenna type and gain) was provided by applicant.

1.6. Channel List

For Bluetooth

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2419 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz
75	2477 MHz	76	2478 MHz	77	2479 MHz
78	2480 MHz	--	--	--	--

1.7. Standards Applicable for Testing

The EUT complies with the requirements of ETSI EN 300 328 V2.2.2 Clause 4.3.1.10 & 4.3.1.11 and AS/NZS 4268: 2017 Clause 6.4 & 7.2.

2. Test Configuration of Equipment under Test

2.1. Test Mode

Test Mode
Mode 1: Transmit by DH5
Mode 2: Transmit by 2DH5
Mode 3: Transmit by 3DH5
Mode 4: Receive by DH5
Mode 5: Receive by 2DH5
Mode 6: Receive by 3DH5

2.2. Test Software

The test utility software used during testing was “Tera term”, and the version was “V4.85”.

2.3. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

3. Test Summary

Clause (EN 300328)	Test Item	Result (Pass/Fail)	Remark
Transmitter Parameter			
4.3.1.10	Transmitter Spurious Emissions	Pass	--
Receiver Parameter			
4.3.1.11	Receiver Spurious Emissions	Pass	--
Note: For radiated spurious emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.			

4. Transmitter Unwanted Emissions in the Spurious Domain


4.1. Limit

Transmitter Limits for Spurious Emissions		
Frequency Range	Maximum Power	Bandwidth
30 MHz to 47 MHz	-36dBm	100 kHz
47 MHz to 74 MHz	-54dBm	100 kHz
74 MHz to 87.5 MHz	-36dBm	100 kHz
87.5 MHz to 118 MHz	-54dBm	100 kHz
118 MHz to 174 MHz	-36dBm	100 kHz
174 MHz to 230 MHz	-54dBm	100 kHz
230 MHz to 470 MHz	-36dBm	100 kHz
470 MHz to 694 MHz	-54dBm	100 kHz
694 MHz to 1 GHz	-36dBm	100 kHz
1 GHz to 12.75 GHz	-30dBm	1 MHz


Note: These limits are e.r.p. for emissions up to 1GHz and e.i.r.p. for emissions above 1GHz.

4.2. Test Setup

30MHz ~ 1GHz Test Setup:

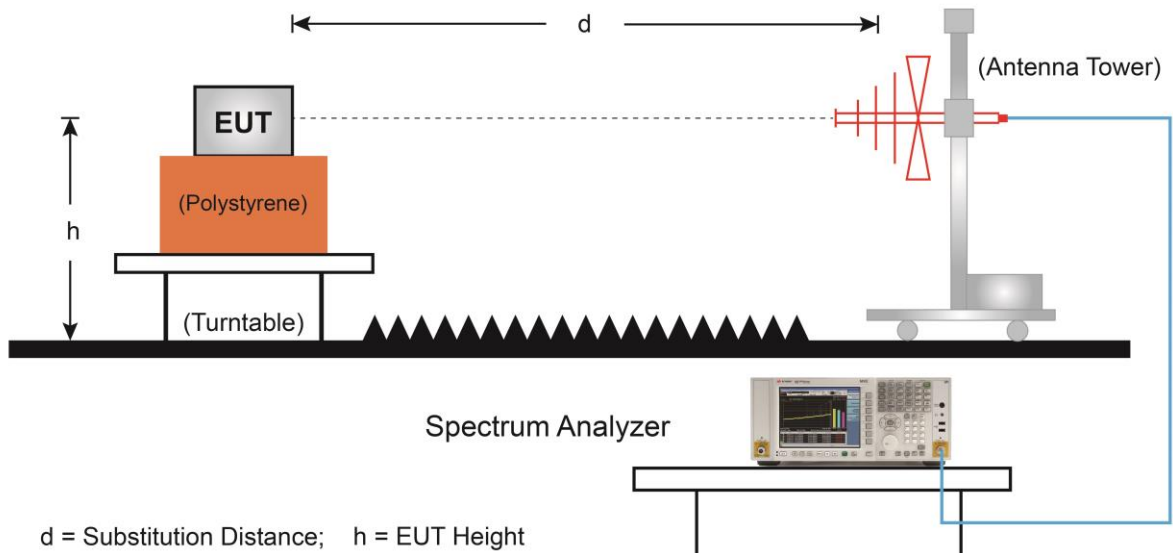

1GHz ~ 12.75GHz Test Setup:

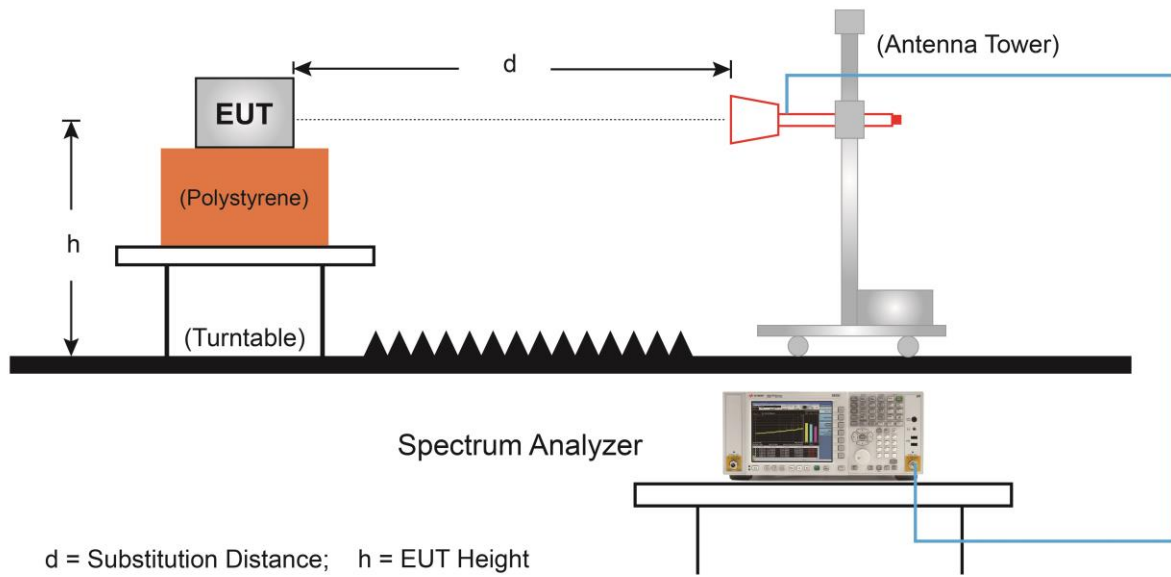

4.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.9.2.2.

4.4. Test Result

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	63.0	-87.1	20.9	-66.2	-54.0	-12.2	Peak	Horizontal
	73.7	-86.3	19.9	-66.4	-54.0	-12.4	Peak	Horizontal
	62.5	-86.2	21.8	-64.4	-54.0	-10.4	Peak	Vertical
	112.9	-87.9	26.6	-61.3	-54.0	-7.3	Peak	Vertical
	3855.3	-52.0	-1.5	-53.5	-30.0	-23.5	Peak	Horizontal
	6393.3	-55.3	3.6	-51.7	-30.0	-21.7	Peak	Horizontal
	3867.0	-51.1	-1.4	-52.5	-30.0	-22.5	Peak	Vertical
	8937.1	-55.9	9.3	-46.6	-30.0	-16.6	Peak	Vertical
78	62.5	-88.4	20.9	-67.5	-54.0	-13.5	Peak	Horizontal
	516.0	-99.6	30.7	-68.9	-54.0	-14.9	Peak	Horizontal
	63.5	-82.9	21.8	-61.1	-54.0	-7.1	Peak	Vertical
	108.6	-89.0	27.7	-61.3	-54.0	-7.3	Peak	Vertical
	5600.1	-54.9	1.3	-53.6	-30.0	-23.6	Peak	Horizontal
	9460.0	-56.4	10.6	-45.8	-30.0	-15.8	Peak	Horizontal
	3872.9	-51.5	-1.4	-52.9	-30.0	-22.9	Peak	Vertical
	5171.3	-54.5	1.4	-53.1	-30.0	-23.1	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	2DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	64.0	-88.0	20.7	-67.3	-54.0	-13.3	Peak	Horizontal
	516.0	-99.4	30.7	-68.7	-54.0	-14.7	Peak	Horizontal
	62.0	-81.9	21.8	-60.1	-54.0	-6.1	Peak	Vertical
	112.5	-87.7	26.7	-61.0	-54.0	-7.0	Peak	Vertical
	3867.0	-50.8	-1.6	-52.4	-30.0	-22.4	Peak	Horizontal
	6587.1	-55.0	4.5	-50.5	-30.0	-20.5	Peak	Horizontal
	3867.0	-51.6	-1.4	-53.0	-30.0	-23.0	Peak	Vertical
	7133.5	-55.7	7.3	-48.4	-30.0	-18.4	Peak	Vertical
78	62.5	-87.5	20.9	-66.6	-54.0	-12.6	Peak	Horizontal
	516.0	-99.4	30.7	-68.7	-54.0	-14.7	Peak	Horizontal
	73.2	-86.4	24.4	-62.0	-54.0	-8.0	Peak	Vertical
	516.0	-98.8	29.7	-69.1	-54.0	-15.1	Peak	Vertical
	3855.3	-52.6	-1.5	-54.1	-30.0	-24.1	Peak	Horizontal
	7697.5	-55.9	7.1	-48.8	-30.0	-18.8	Peak	Horizontal
	3867.0	-51.5	-1.4	-52.9	-30.0	-22.9	Peak	Vertical
	7920.8	-57.6	8.7	-48.9	-30.0	-18.9	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	3DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	72.7	-86.1	20.1	-66.0	-54.0	-12.0	Peak	Horizontal
	516.0	-98.3	30.7	-67.6	-54.0	-13.6	Peak	Horizontal
	63.0	-84.8	21.8	-63.0	-54.0	-9.0	Peak	Vertical
	72.7	-85.3	24.2	-61.1	-54.0	-7.1	Peak	Vertical
	3849.4	-51.7	-1.4	-53.1	-30.0	-23.1	Peak	Horizontal
	7873.8	-56.2	7.7	-48.5	-30.0	-18.5	Peak	Horizontal
	3861.1	-51.4	-1.4	-52.8	-30.0	-22.8	Peak	Vertical
	9313.1	-57.1	10.7	-46.4	-30.0	-16.4	Peak	Vertical
78	62.5	-86.9	20.9	-66.0	-54.0	-12.0	Peak	Horizontal
	516.0	-99.4	30.7	-68.7	-54.0	-14.7	Peak	Horizontal
	63.5	-83.6	21.8	-61.8	-54.0	-7.8	Peak	Vertical
	72.7	-86.0	24.2	-61.8	-54.0	-7.8	Peak	Vertical
	4789.4	-53.9	0.7	-53.2	-30.0	-23.2	Peak	Horizontal
	8102.9	-56.5	8.4	-48.1	-30.0	-18.1	Peak	Horizontal
	3872.9	-54.0	-1.4	-55.4	-30.0	-25.4	Peak	Vertical
	7168.8	-55.9	6.6	-49.3	-30.0	-19.3	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

5. Receiver Spurious Emissions


5.1. Limit

Spurious Emissions Limits for Receivers		
Frequency Range	Maximum Power	Measurement Bandwidth
30 MHz to 1 GHz	-57dBm	100 kHz
1 GHz to 12.75 GHz	-47dBm	1 MHz


Note: These limits are e.r.p. for emissions up to 1GHz and e.i.r.p. for emissions above 1GHz.

5.2. Test Setup

30MHz ~ 1GHz Test Setup:

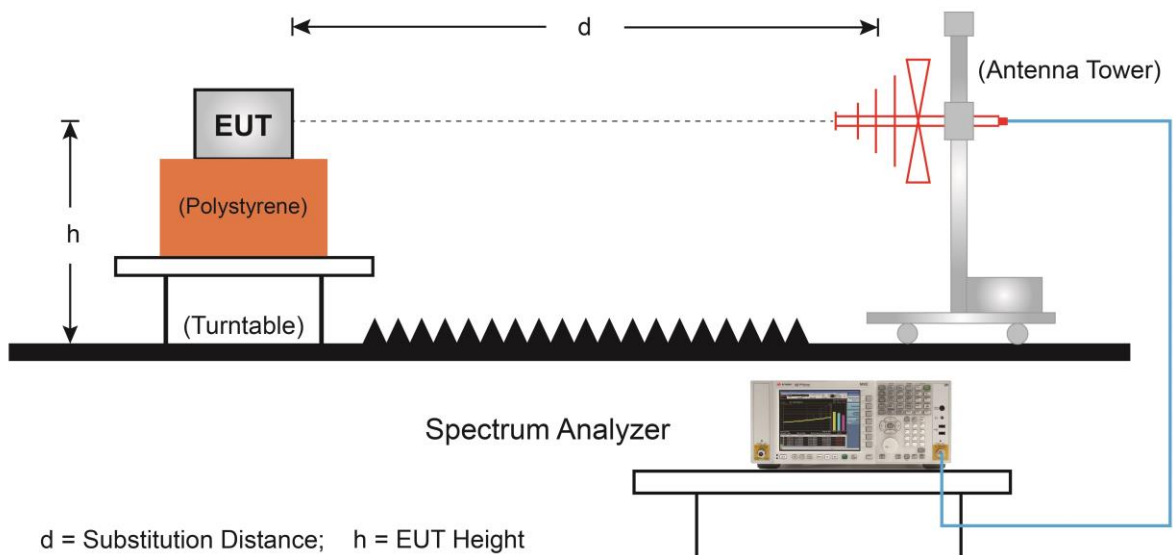

1GHz ~ 12.75GHz Test Setup:

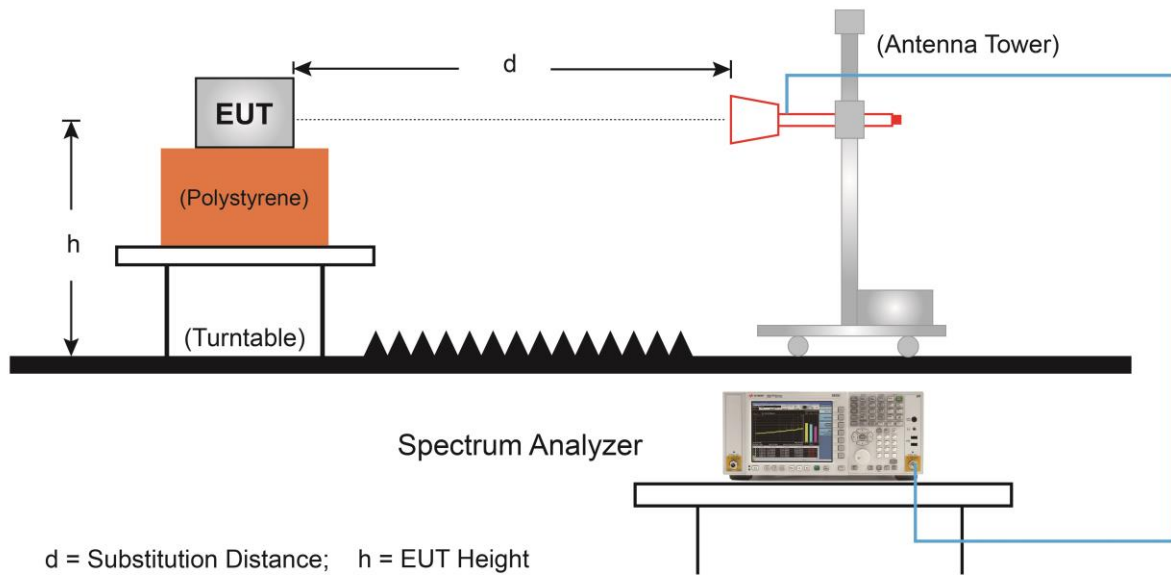

5.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.10.2.2.

5.4. Test Result

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	74.6	-86.5	19.8	-66.7	-57.0	-9.7	Peak	Horizontal
	516.0	-97.9	30.7	-67.2	-57.0	-10.2	Peak	Horizontal
	81.9	-93.3	29.2	-64.1	-57.0	-7.1	Peak	Vertical
	117.8	-92.9	25.8	-67.1	-57.0	-10.1	Peak	Vertical
	1922.4	-50.3	-6.4	-56.7	-47.0	-9.7	Peak	Horizontal
	2880.0	-52.8	-3.3	-56.1	-47.0	-9.1	Peak	Horizontal
	1922.4	-50.3	-6.3	-56.6	-47.0	-9.6	Peak	Vertical
	2880.0	-51.7	-3.3	-55.0	-47.0	-8.0	Peak	Vertical
78	72.7	-90.9	20.1	-70.8	-57.0	-13.8	Peak	Horizontal
	516.0	-100.7	30.7	-70.0	-57.0	-13.0	Peak	Horizontal
	73.7	-87.5	24.5	-63.0	-57.0	-6.0	Peak	Vertical
	303.1	-89.4	26.0	-63.4	-57.0	-6.4	Peak	Vertical
	1922.4	-48.6	-6.4	-55.0	-47.0	-8.0	Peak	Horizontal
	2880.0	-51.8	-3.3	-55.1	-47.0	-8.1	Peak	Horizontal
	1922.4	-49.1	-6.3	-55.4	-47.0	-8.4	Peak	Vertical
	2880.0	-50.1	-3.3	-53.4	-47.0	-6.4	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	2DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	74.6	-88.6	19.8	-68.8	-57.0	-11.8	Peak	Horizontal
	516.0	-100.2	30.7	-69.5	-57.0	-12.5	Peak	Horizontal
	72.7	-88.5	24.2	-64.3	-57.0	-7.3	Peak	Vertical
	274.4	-88.5	25.0	-63.5	-57.0	-6.5	Peak	Vertical
	1105.8	-48.2	-9.8	-58.0	-47.0	-11.0	Peak	Horizontal
	1922.4	-47.5	-6.4	-53.9	-47.0	-6.9	Peak	Horizontal
	1922.4	-50.1	-6.3	-56.4	-47.0	-9.4	Peak	Vertical
	2880.0	-50.6	-3.3	-53.9	-47.0	-6.9	Peak	Vertical
78	74.1	-87.9	19.9	-68.0	-57.0	-11.0	Peak	Horizontal
	860.3	-101.6	34.3	-67.3	-57.0	-10.3	Peak	Horizontal
	130.9	-89.3	24.3	-65.0	-57.0	-8.0	Peak	Vertical
	417.5	-95.5	27.5	-68.0	-57.0	-11.0	Peak	Vertical
	1922.4	-48.6	-6.4	-55.0	-47.0	-8.0	Peak	Horizontal
	2880.0	-52.5	-3.3	-55.8	-47.0	-8.8	Peak	Horizontal
	1916.5	-49.5	-6.4	-55.9	-47.0	-8.9	Peak	Vertical
	2204.4	-52.8	-3.7	-56.5	-47.0	-9.5	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

Test Site	SIP-AC2	Test Engineer	Tyler Yuan
Test Date	2020/08/04~2020/08/06	Test Mode	3DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	60.1	-91.7	21.0	-70.7	-57.0	-13.7	Peak	Horizontal
	368.5	-97.2	27.2	-70.0	-57.0	-13.0	Peak	Horizontal
	80.4	-91.9	28.8	-63.1	-57.0	-6.1	Peak	Vertical
	107.6	-91.9	27.7	-64.2	-57.0	-7.2	Peak	Vertical
	1922.4	-48.2	-6.4	-54.6	-47.0	-7.6	Peak	Horizontal
	2880.0	-53.0	-3.3	-56.3	-47.0	-9.3	Peak	Horizontal
	1922.4	-48.8	-6.3	-55.1	-47.0	-8.1	Peak	Vertical
	2880.0	-49.9	-3.3	-53.2	-47.0	-6.2	Peak	Vertical
78	76.6	-89.3	19.5	-69.8	-57.0	-12.8	Peak	Horizontal
	516.0	-99.9	30.7	-69.2	-57.0	-12.2	Peak	Horizontal
	72.2	-88.0	23.9	-64.1	-57.0	-7.1	Peak	Vertical
	417.5	-95.5	27.5	-68.0	-57.0	-11.0	Peak	Vertical
	1922.4	-47.9	-6.4	-54.3	-47.0	-7.3	Peak	Horizontal
	3855.3	-51.6	-1.5	-53.1	-47.0	-6.1	Peak	Horizontal
	1922.4	-50.0	-6.3	-56.3	-47.0	-9.3	Peak	Vertical
	2880.0	-50.7	-3.3	-54.0	-47.0	-7.0	Peak	Vertical

Note: Measure Level (dBm) = Reading Level (dBm) + Factor (dB)

6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Occupied Channel Bandwidth	5 %
RF Output Power, Conducted	1.5 dB
Power Spectral Density, Conducted	3 dB
Unwanted Emissions, Conducted	3 dB
All Emissions, Radiated	6 dB
Temperature	3°C
Humidity	5 %
DC and Low Frequency Voltages	3 %
Time	5 %
Duty Cycle	5 %

7. List of Measuring Instrument

Transmitter Spurious Emissions and Receiver Spurious Emissions (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Transmitter Spurious Emissions and Receiver Spurious Emissions (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/05/26
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Transmitter Spurious Emissions and Receiver Spurious Emissions (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845S E	MRTSUE06600	1 year	2021/11/12
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

Transmitter Spurious Emissions and Receiver Spurious Emissions (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/12
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/13
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

Transmitter Spurious Emissions and Receiver Spurious Emissions (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/15
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2022/01/15
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

Software	Version	Function
EMI Software	V3	EMI Test Software

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2005RSU005-ET" file.

Appendix B - EUT Photograph

Refer to "2005RSU005-EE" file.